

10 & 12 Inch

WINLOCK

Post Port Letterplates

LETTERPLATE
FLAP OPENS TO 180°

INTEGRAL BRUSH STRIP
FOR GREATER INSULATION

POST PORT LETTERPLATES
FEATURE A ROUNDED EDGE AND CORNER

SEALED
LETTERPLATE FLAP

ADJUSTABLE TELESCOPIC
SLEEVES FOR A PERFECT FIT

ENCLOSED BOTTOM
RAILS WITH FINGERTIP RECESS

FITTED WITH INTEGRAL
SOUND DAMPENING BUMPERS

Ergonomic curved edge design

Letterplate flap opens to 180°

Adjustable telescopic sleeve set

Suitable for door thicknesses 20-80mm

Fully sealed backplate

Fully sealed letterplate flap

Fitted with insulating brush strip

Fitted with integral sound dampening bumpers



WINLOCK


Winlock Security Ltd
Halesfield 8, Telford, Shropshire TF7 4ES, England
t: 01952 680178 f: 01952 684355 e: sales@winlock.co.uk

12" Slimline Letterplates

WINLOCK 

12" Flushback Letterplates

SLIMLINE LETTERPLATES ARE
A STYLISH AND ULTRA SLIM DESIGN

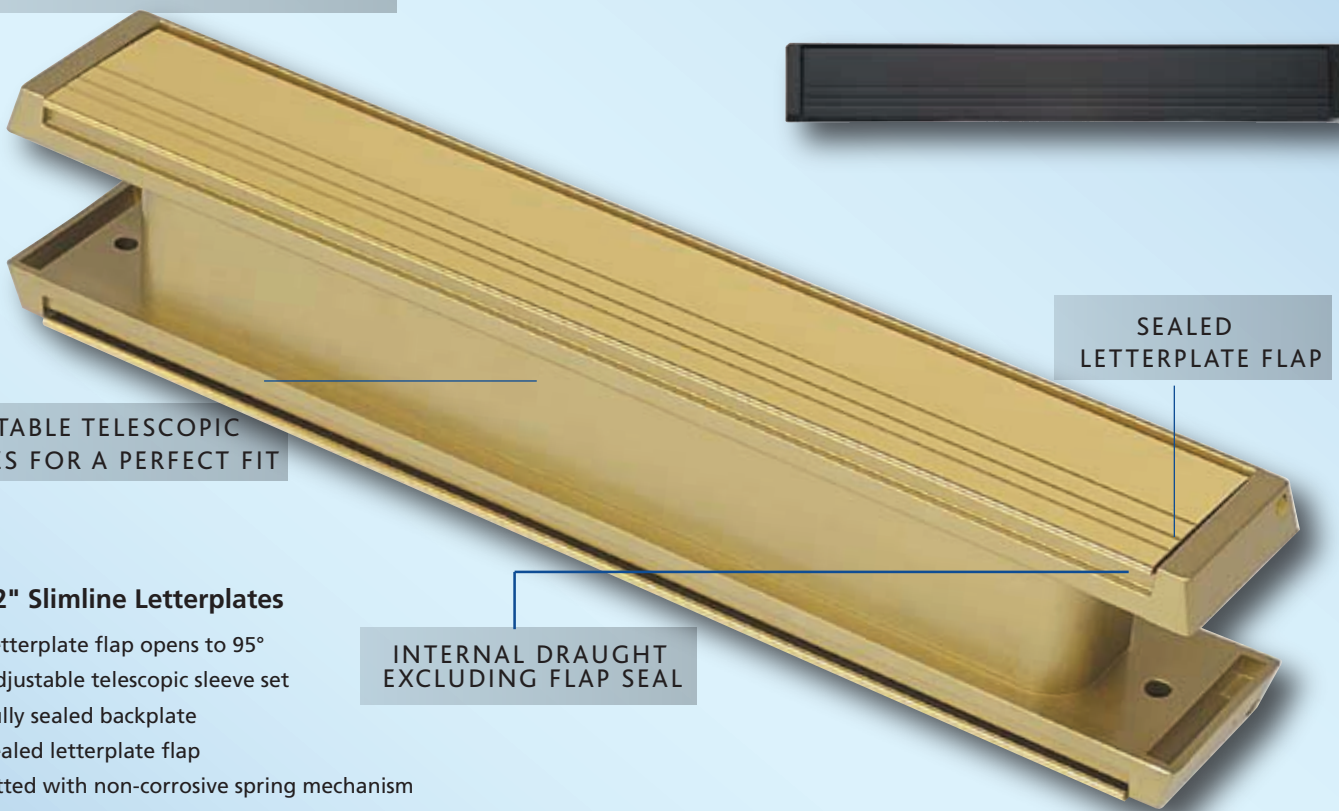

ADJUSTABLE TELESCOPIC
SLEEVES FOR A PERFECT FIT

12" Slimline Letterplates

- Letterplate flap opens to 95°
- Adjustable telescopic sleeve set
- Fully sealed backplate
- Sealed letterplate flap
- Fitted with non-corrosive spring mechanism


INTERNAL DRAUGHT
EXCLUDING FLAP SEAL

SEALED
LETTERPLATE FLAP

FLUSHBACK LETTERPLATES
IDEAL FOR RETRO FITTING

12" Flushback Letterplates

- Fits over existing aperture
- Letterplate flap opens to 135°
- Fully sealed letterplate flap
- Fitted with insulating brush strip

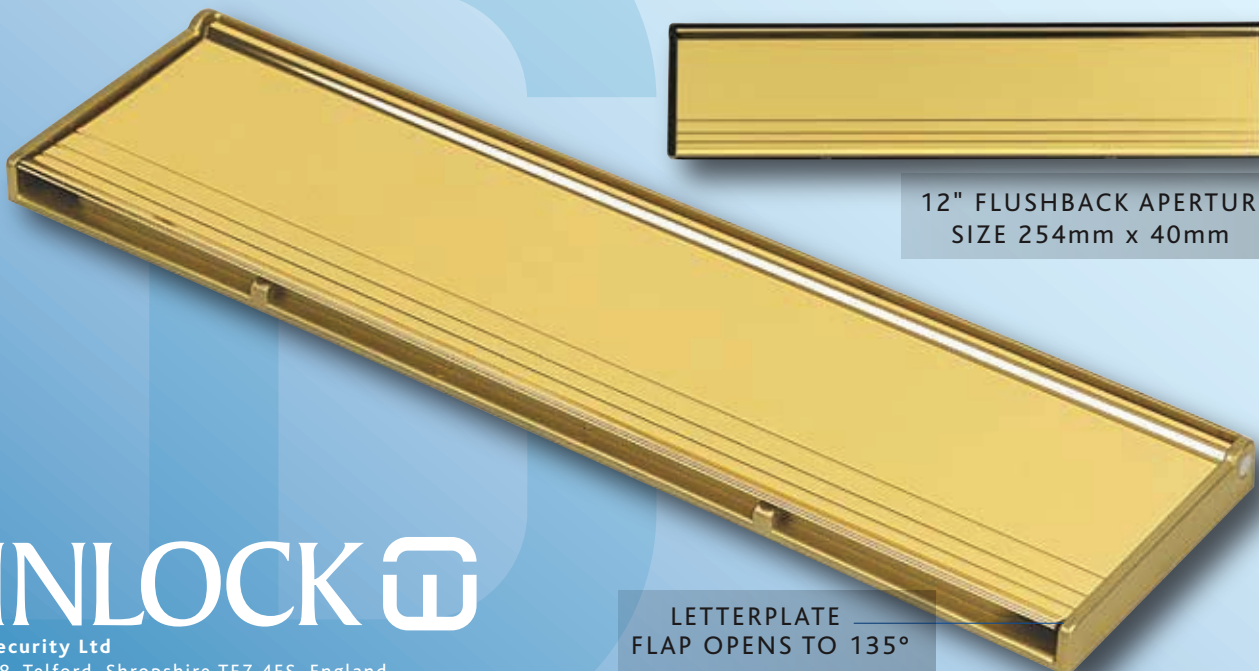

12" FLUSHBACK APERTURE
SIZE 254mm x 40mm

LETTERPLATE
FLAP OPENS TO 135°

WINLOCK 

Winlock Security Ltd
Halesfield 8, Telford, Shropshire TF7 4ES, England
t: 01952 680178 f: 01952 684355 e: sales@winlock.co.uk


Fire-rated Letterplates

WINLOCK 

ALL FIRE-RATED LETTERPLATES ARE BASED ON THE POST PORT ASSEMBLIES*

LETTERPLATE FLAP OPENS TO 180°

TESTED & ASSESSED TO BS476: PART 20/22 & 31.1

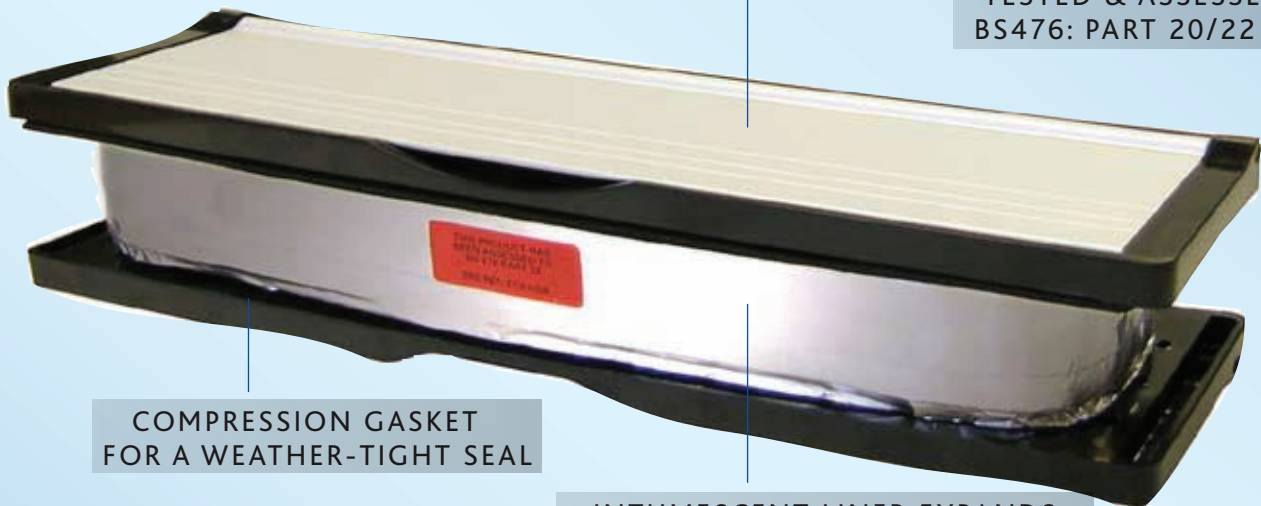

COMPRESSION GASKET FOR A WEATHER-TIGHT SEAL

INTUMESCENT LINER EXPANDS & SEALS THE APERTURE IN A FIRE

Fire-rated Letterplates To suit half-hour fire doors

Fitted with intumescent liner
Adjustable telescopic sleeve set
Fully sealed backplate

Fully sealed letterplate flap
Available in 10 and 12"
180° flap opening

MAP Fire-rated letterplates are fitted with an intumescent liner around the telescopic sleeve section of the letterplate. In the event of a fire the intumescent liner expands to seal the letterbox aperture and retains the fire integrity of the door. Fire-rated versions are available in 'Post Port' letterplate assemblies.

To order the fire-rated option simply quote FR3 after the Post Port product code number.

Frame Colour	Flap Colour	Code
Black	Satin Nickel	54210-34ELFR3
Black	Polished Silver	54210-35ELFR3
Black	Etched Gold	54210-36ELFR3

Fire-rated letterplates - test information

MAP Fire-rated letterplates have been fully tested and assessed in the following applications:

Report No. RF96095


The door frame was tested opening into the furnace which is considered to be the most onerous direction, however the opinion of the Chiltern laboratory was that doors could be applied to open in either direction. The Door was measured at 1978mm high x 835mm wide x 53.5mm thick and was fitted with a latch which was disengaged. A MAP fire-rated letterplate with a graphite intumescent liner was fitted 1410mm from the leaf head and 295mm from the closing edge of the door.

When tested in accordance with BS476: Part 20/22: 1987 and Part 31.1: 1983, the requirements of the standard were satisfied for the following periods:

INTEGRITY - 43 MINUTES

INSULATION - 43 MINUTES

Integrity failure recorded to the intumescent letterbox assembly was 43 minutes and 45 seconds on the termination of this test.

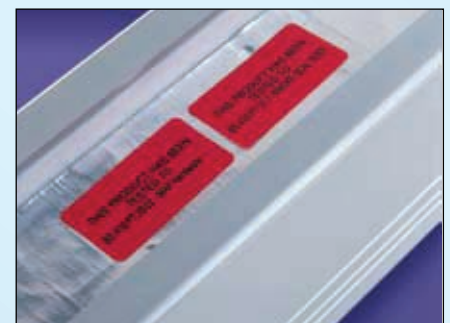

Close-up showing the intumescent liner on the fire-rated letterplate assembly.

WINLOCK 

Winlock Security Ltd
Halesfield 8, Telford, Shropshire TF7 4ES, England
t: 01952 680178 f: 01952 684355 e: sales@winlock.co.uk

Note:


To achieve optimum performance, the letterbox assembly should be fitted up to 1050mm from the bottom of the door.

*Integral brush strips are not fitted to fire-rated letterplates.

Letterplate Specifications



10 & 12" Post Port Letterplates

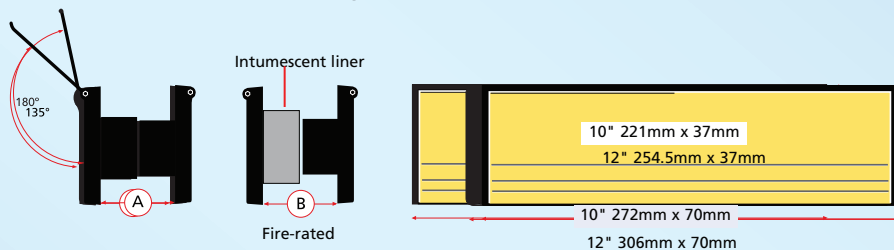

- Ⓐ Available for door thicknesses of 20mm to 40mm (size 1)
- Ⓐ Available for door thicknesses of 40mm to 80mm (size 2)
- Cut door aperture: 10" - 252mm x 50mm or 12" - 285mm x 50mm

10 & 12" Post Port Fire-rated Option


- Ⓑ Available for door thicknesses of 40mm to 80mm (size 2)
- Cut door aperture: 10" - 252mm x 57mm or 12" - 285mm x 57mm



...quality,
service and
delivery


Quality manufacture, product innovation and highly competitive pricing structures are cornerstones to our success, but this has to be backed by a first class delivery service. Select Hardware hold sufficiently high levels of stock to meet the most demanding of customers with consignments despatched all over the UK and Europe and to this we guarantee to meet our 'lead time' deadlines.

12" Slimline Letterplates

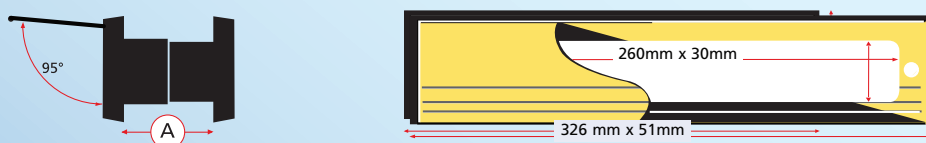

- Ⓐ Available for door thicknesses of 40mm to 80mm (size 2)
- Cut door aperture: 272mm x 38mm

12" Flushback Letterplates

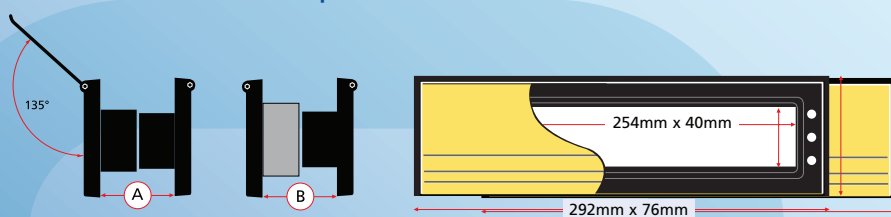

- Cut door aperture: 266mm x 54mm

Letterplate Test Methods

Select Hardware operates a Management System that confirms with and meets the requirements of ISO 9001 quality standard and ISO 14001 environmental standard, which covers all aspects of our operation



Water Tightness Test: Clause 6.22 of PAS23-1999

Results: No leakage at 200 PA Air Pressure or below in accordance with BS5368-3 1978 spray method 2 water spray.

Flap Durability Tests: In accordance with Certificate TS32 to performance in durability and corrosion.

Flap Opening Test: 15,000 exceeded. Resisted forces of between 80-100 Newtons after cycling.

Durability Test: Exposed to neutral salt spray BSEN1670. No corrosion of flap which worked with limits of force specified in test.



Winlock Security Ltd

Halesfield 8, Telford, Shropshire TF7 4ES, England


t: 01952 680178 f: 01952 684355 e: sales@winlock.co.uk



Frame Colour Flap Finish


POST PORT

Black	White
Black	Black
Black	Lacq. Brass
Black	S.A.A
Black	Pol. Gold
Black	Pol. Silver
Black	Etch Gold
Black	Satin Nickel
Black	Chrome
White	White
Silver	S.A.A
Gold	Pol. Gold



SLIMLINE

Black	Pol. Gold
White	White
Silver	S.A.A
Gold	Pol. Gold



FLUSHBACK

Black	Black
White	White
Silver	S.A.A
Gold	Pol. Gold



SECURITY COWL

White

Size 1


(Thickness 20-40mm)
Box Qty - 50 Sets

10" 12"


Size 2

(Thickness 40-80mm)
Box Qty - 40 Sets

10" 12"




White on Black




Polished Gold on Black




White on White



Lacq. Brass on Black




Black on Black




Etched Gold on Black



S.A.A on Silver



Satin Nickel on Black



S.A.A on Black



Polished Silver on Black



Polished Gold on Gold



Chrome on Black